


LEH 14-Series Medium Duty Industrial Top Plate Casters

660 - 1,250 lbs

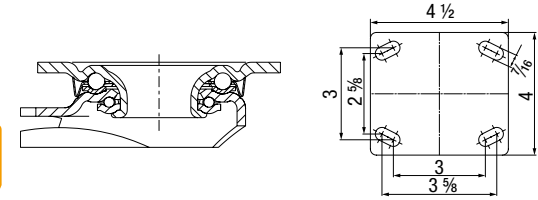

POG / SPOG
Wheel: High-quality, impact-resistant nylon, very rugged (POG series), extra heavy wheel design (SPOG series), 70° shore D, gray.
Bearing type: Ball bearing.
For more information refer to page 88-89

POEV
Tires: High-quality elastic solid rubber in smooth rolling quality 'Blickle EasyRoll', 65° shore A, gray. Vulcanized tire.
Wheel center: Impact-resistant nylon, black.
Bearing type: Ball bearing.
For more information refer to page 75

ALEV
Tires: High-quality elastic solid rubber in smooth rolling quality 'Blickle EasyRoll', 65° shore A, black. Vulcanized tire.
Wheel center: Die-cast aluminum.
Bearing type: Ball bearing.
For more information refer to page 76

POTH
Tread: High-quality thermoplastic polyurethane (TPU), 94° shore A, dark gray, non-marking, non-staining, chemically bonded.
Wheel center: Impact-resistant nylon, natural white.
Bearing type: Ball bearing.
For more information refer to page 79



ALTH
Tread: High-quality polyurethane-elastomer Blickle Extrathane®, 92° shore A, light brown, non-marking, non-staining. Cast tread.
Wheel center: Die-cast aluminum.
Bearing type: Ball bearing.
For more information refer to page 82

ALST
Tread: High-quality polyurethane-elastomer Blickle Softthane®, 75° shore A, green, non-marking, non-staining. Cast tread.
Wheel center: Die-cast aluminum.
Bearing type: Ball bearing.
For more information refer to page 80

ALB
Tread: High-quality polyurethane-elastomer Blickle Besthane®, 92° shore A, brown, non-marking, non-staining. Cast tread.
Wheel center: Die-cast aluminum.
Bearing type: Ball bearing.
For more information refer to page 85

ALBS
Tread: High-quality polyurethane-elastomer Blickle Besthane® Soft, 75° shore A, blue, non-marking, non-staining. Cast tread.
Wheel center: Die-cast aluminum.
Bearing type: Ball bearing.
For more information refer to page 81

Swivel Casters	Rigid Casters	Swivel Casters with 'Stop-Fix' Brake	Wheel Ø [inch] [mm]	Wheel Width [inch] [mm]	Load Capacity [lbs] [kg]	Bearing Type	Total Height [inch] [mm]	Plate Size [inch]	Bolt Hole Spacing [inch]	For Mounting Bolt [inch]	Swivel Lead [inch]
LEH-POG / LEH-SPOG Series											
LEH-POG 150K-14	BEHS-POG 150K-14	LEH-POG 150K-14-FI	6 [150]	2 [50]	880 [400]	Ball bearing	7 1/2 [191]	4 x 4 1/2	2 5/8 x 3/8 / 3x3	3/8	2 1/8
LEH-SPOG 150K-14	BEHS-SPOG 150K-14	LEH-SPOG 150K-14-FI	6 [150]	2 [50]	1250 [570]	Ball bearing	7 1/2 [191]	4 x 4 1/2	2 5/8 x 3/8 / 3x3	3/8	2 1/8
LEH-POG 160K-14	BEHS-POG 160K-14	LEH-POG 160K-14-FI	6 5/16 [160]	2 [50]	1000 [450]	Ball bearing	7 7/8 [199]	4 x 4 1/2	2 5/8 x 3/8 / 3x3	3/8	2 1/4
LEH-SPOG 160K-14	BEHS-SPOG 160K-14	LEH-SPOG 160K-14-FI	6 5/16 [160]	2 [50]	1250 [570]	Ball bearing	7 7/8 [199]	4 x 4 1/2	2 5/8 x 3/8 / 3x3	3/8	2 1/4
LEH-POG 200K-14	BEHS-POG 200K-14	LEH-POG 200K-14-FI	8 [200]	2 [50]	1250 [570]	Ball bearing	9 1/2 [241]	4 x 4 1/2	2 5/8 x 3/8 / 3x3	3/8	2 3/8
LEH-POG 200K-14-01 *	BEHS-POG 200K-14-01 *		8 [200]	2 [50]	770 [350]	Ball bearing	10 1/8 [257]	4 x 4 1/2	2 5/8 x 3/8 / 3x3	3/8	2 1/2
LEH-SPOG 201K-14	BEHS-SPOG 201K-14	LEH-SPOG 201K-14-FI	8 [200]	2 [50]	1250 [570]	Ball bearing	9 1/2 [241]	4 x 4 1/2	2 5/8 x 3/8 / 3x3	3/8	2 3/8
LEH-SPOG 201K-14-01 *	BEHS-SPOG 201K-14-01 *		8 [200]	2 [50]	770 [350]	Ball bearing	10 1/8 [257]	4 x 4 1/2	2 5/8 x 3/8 / 3x3	3/8	2 1/2
LEH-POEV Series											
LEH-POEV 160K-14-SG	BEHS-POEV 160K-14-SG	LEH-POEV 160K-14-FI-SG	6 5/16 [160]	2 [50]	880 [400]	Ball bearing	7 7/8 [199]	4 x 4 1/2	2 5/8 x 3/8 / 3x3	3/8	2 1/4
LEH-POEV 200K-14-SG	BEHS-POEV 200K-14-SG	LEH-POEV 200K-14-FI-SG	8 [200]	2 [50]	1100 [500]	Ball bearing	9 1/2 [241]	4 x 4 1/2	2 5/8 x 3/8 / 3x3	3/8	2 3/8
LEH-POEV 200K-14-SG-01*	BEHS-POEV 200K-14-SG-01*		8 [200]	2 [50]	770 [350]	Ball bearing	10 1/8 [257]	4 x 4 1/2	2 5/8 x 3/8 / 3x3	3/8	2 1/2
LEH-ALEV Series											
LEH-ALEV 150K-14	BEHS-ALEV 150K-14	LEH-ALEV 150K-14-FI	6 [150]	2 [50]	880 [400]	Ball bearing	7 1/2 [191]	4 x 4 1/2	2 5/8 x 3/8 / 3x3	3/8	2 1/8
LEH-ALEV 160K-14	BEHS-ALEV 160K-14	LEH-ALEV 160K-14-FI	6 5/16 [160]	2 [50]	880 [400]	Ball bearing	7 7/8 [199]	4 x 4 1/2	2 5/8 x 3/8 / 3x3	3/8	2 1/4
LEH-ALEV 200K-14	BEHS-ALEV 200K-14	LEH-ALEV 200K-14-FI	8 [200]	2 [50]	1100 [500]	Ball bearing	9 1/2 [241]	4 x 4 1/2	2 5/8 x 3/8 / 3x3	3/8	2 3/8
LEH-ALEV 200K-14-01 *	BEHS-ALEV 200K-14-01 *		8 [200]	2 [50]	770 [350]	Ball bearing	10 1/8 [257]	4 x 4 1/2	2 5/8 x 3/8 / 3x3	3/8	2 1/2
LEH-POTH Series											
LEH-POTH 150K-14	BEHS-POTH 150K-14	LEH-POTH 150K-14-FI	6 [150]	1 3/4 [45]	1100 [500]	Ball bearing	7 1/2 [191]	4 x 4 1/2	2 5/8 x 3/8 / 3x3	3/8	2 1/8
LEH-POTH 160K-14	BEHS-POTH 160K-14	LEH-POTH 160K-14-FI	6 5/16 [160]	1 3/4 [45]	1210 [550]	Ball bearing	7 7/8 [199]	4 x 4 1/2	2 5/8 x 3/8 / 3x3	3/8	2 1/4
LEH-POTH 200K-14	BEHS-POTH 200K-14	LEH-POTH 200K-14-FI	8 [200]	2 [50]	1250 [570]	Ball bearing	9 1/2 [241]	4 x 4 1/2	2 5/8 x 3/8 / 3x3	3/8	2 3/8
LEH-POTH 200K-14-01 *	BEHS-POTH 200K-14-01 *		8 [200]	2 [50]	770 [350]	Ball bearing	10 1/8 [257]	4 x 4 1/2	2 5/8 x 3/8 / 3x3	3/8	2 1/2

Swivel Casters	Rigid Casters	Swivel Casters with 'Stop-Fix' Brake	Wheel Ø [inch] [mm]	Wheel Width [inch] [mm]	Load Capacity [lbs] [kg]	Bearing Type	Total Height [inch] [mm]	Plate Size [inch]	Bolt Hole Spacing [inch]	For Mounting Bolt [inch]	Swivel Lead [inch]
LEH-ALTH Series											
LEH-ALTH 150K-14	BEHS-ALTH 150K-14	LEH-ALTH 150K-14-FI	6 [150]	2 [50]	1100 [500]	Ball bearing	7 1/2 [191]	4 x 4 1/2	2 5/8 x 3/8 / 3x3	3/8	2 1/8
LEH-ALTH 200K-14	BEHS-ALTH 200K-14	LEH-ALTH 200K-14-FI	8 [200]	2 [50]	1250 [570]	Ball bearing	9 1/2 [241]	4 x 4 1/2	2 5/8 x 3/8 / 3x3	3/8	2 3/8
LEH-ALTH 200K-14-01 *	BEHS-ALTH 200K-14-01 *		8 [200]	2 [50]	770 [350]	Ball bearing	10 1/8 [257]	4 x 4 1/2	2 5/8 x 3/8 / 3x3	3/8	2 1/2
LEH-ALTH 200K-14-02 **	BEHS-ALTH 200K-14-01 *		8 [200]	2 [50]	660 [300]	Ball bearing	10 1/8 [257]	4 x 4 1/2	2 5/8 x 3/8 / 3x3	3/8	3 1/4
LEH-ALST Series											
LEH-ALST 150K-14	BEHS-ALST 150K-14	LEH-ALST 150K-14-FI	6 [150]	2 [50]	1100 [500]	Ball bearing	7 1/2 [191]	4 x 4 1/2	2 5/8 x 3/8 / 3x3	3/8	2 1/8
LEH-ALST 150K-14-CO***	BEHS-ALST 150K-14-CO***	LEH-ALST 150K-14-FI-CO***	6 [150]	2 [50]	1100 [500]	Ball bearing	7 1/2 [191]	4 x 4 1/2	2 5/8 x 3/8 / 3x3	3/8	2 1/8
LEH-ALST 200K-14	BEHS-ALST 200K-14	LEH-ALST 200K-14-FI	8 [200]	2 [50]	1250 [570]	Ball bearing	9 1/2 [241]	4 x 4 1/2	2 5/8 x 3/8 / 3x3	3/8	2 3/8
LEH-ALST 200K-14-CO***	BEHS-ALST 200K-14-CO***	LEH-ALST 200K-14-FI-CO***	8 [200]	2 [50]	1250 [570]	Ball bearing	9 1/2 [241]	4 x 4 1/2	2 5/8 x 3/8 / 3x3	3/8	2 3/8
LEH-ALST 200K-14-01 *	BEHS-ALST 200K-14-01 *		8 [200]	2 [50]	770 [350]	Ball bearing	10 1/8 [257]	4 x 4 1/2	2 5/8 x 3/8 / 3x3	3/8	2 1/2
LEH-ALST 200K-14-02 **	BEHS-ALST 200K-14-01 *		8 [200]	2 [50]	660 [300]	Ball bearing	10 1/8 [257]	4 x 4 1/2	2 5/8 x 3/8 / 3x3	3/8	3 1/4
LEH-ALB Series											
LEH-ALB 150K-14	BEHS-ALB 150K-14	LEH-ALB 150K-14-FI	6 [150]	2 [50]	1100 [500]	Ball bearing	7 1/2 [191]	4 x 4 1/2	2 5/8 x 3/8 / 3x3	3/8	2 1/8
LEH-ALB 200K-14	BEHS-ALB 200K-14	LEH-ALB 200K-14-FI	8 [200]	2 [50]	1250 [570]	Ball bearing	9 1/2 [241]	4 x 4 1/2	2 5/8 x 3/8 / 3x3	3/8	2 3/8
LEH-ALB 200K-14-01 *	BEHS-ALB 200K-14-01 *		8 [200]	2 [50]	770 [350]	Ball bearing	10 1/8 [257]	4 x 4 1/2	2 5/8 x 3/8 / 3x3	3/8	2 1/2
LEH-ALB 200K-14-02 **	BEHS-ALB 200K-14-01 *		8 [200]	2 [50]	660 [300]	Ball bearing	10 1/8 [257]	4 x 4 1/2	2 5/8 x 3/8 / 3x3	3/8	3 1/4
LEH-ALBS Series											
LEH-ALBS 150K-14-CO***	BEHS-ALBS 150K-14-CO***	LEH-ALBS 150K-14-FI-CO***	6 [150]	2 [50]	1100 [500]	Ball bearing	7 1/2 [191]	4 x 4 1/2	2 5/8 x 3/8 / 3x3	3/8	2 1/8
LEH-ALBS 200K-14-CO***	BEHS-ALBS 200K-14-CO***	LEH-ALBS 200K-14-FI-CO***	8 [200]	2 [50]	1250 [570]	Ball bearing	9 1/2 [241]	4 x 4 1/2	2 5/8 x 3/8 / 3x3	3/8	2 3/8
LEH-ALBS 200K-14-01 *	BEHS-ALBS 200K-14-01 *		8 [200]	2 [50]	770 [350]	Ball bearing	10 1/8 [257]	4 x 4 1/2	2 5/8 x 3/8 / 3x3	3/8	2 1/2
LEH-ALBS 200K-14-02 **	BEHS-ALBS 200K-14-01 *		8 [200]	2 [50]	660 [300]	Ball bearing	10 1/8 [257]	4 x 4 1/2	2 5/8 x 3/8 / 3x3	3/8	3 1/4

Options

Product Code Suffix	With 'Stop-Top' Brake	Swivel Lock (Retro Fit) 1 x 360° **	With Steel Foot Guard	With Special Foot Guard	With Pressed Steel Thread Guard, Zinc-Plated	Electrically Conductive Version, Black Rubber Tire	Antistatic Version, Non-Marking Gray Rubber Tire	Antistatic Version, Non-Marking Gray	Antistatic Version, Non-Marking Gray	With Soft Polyurethane Wheels on Cast Iron Center	With Polyurethane Wheels on Cast Iron Center	With Soft Polyurethane Wheels on Cast Iron Center	Heat-Resistant Version	Caster Pads for Swivel and Rigid Versions	More Options with this Bolt Hole Pattern
-ST	RI-04.14	-FS	-FS	-FA	-EL	-SG-AS	-AS	-AS					LIEH series	CP-14	
Available for	Consult factory	All sizes	Consult factory	Consult factory	Consult factory	Consult factory	Consult factory	Consult factory	Consult factory	Consult factory	Consult factory	Consult factory	Consult factory	Consult factory	Refer to page 52/53/54/55

* With overall height 10 1/8"
 ** Only for swivel casters without 'stop-fix' brake
 * With overall height 10 1/8"
 ***With extra crowned running tread
 ** With overall height 10 1/8" and extended swivel lead 3 1/4".