


LK/LE 14-Series Industrial Top Plate Casters

330 - 770 lbs ✓RoHS

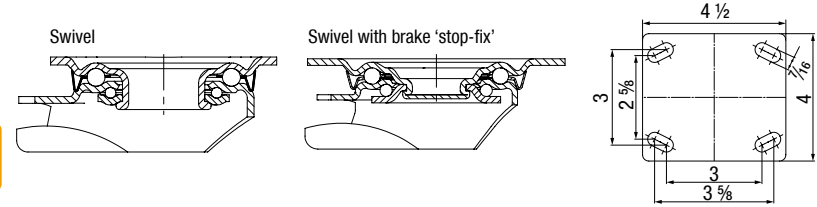

POG
Wheel: Impact-resistant nylon, 70° shore D, gray.
Bearing types: Plain bore, ball bearing or ball bearing (C).
For more information refer to page 88

PATH
Tread: High-quality thermoplastic polyurethane (TPU), 94° shore A, dark gray, non-marking, non-staining, chemically bonded.
Wheel center: Impact-resistant nylon, silver gray.
Bearing type: Ball bearing (C), Ø 3 1/8" - 5" with synthetic thread guard.
For more information refer to page 78

POEV
Tires: High-quality elastic solid rubber in smooth rolling quality 'Blickle EasyRoll', 65° shore A, gray. Vulcanized tire.
Wheel center: Impact-resistant nylon, black.
Bearing types: Ball bearing or ball bearing (C).
For more information refer to page 75

ALEV
Tires: High-quality elastic solid rubber in smooth rolling quality 'Blickle EasyRoll', 65° shore A, black. Vulcanized tire.
Wheel center: Die-cast aluminum.
Bearing type: Ball bearing.
For more information refer to page 76



POTH
Tread: High-quality thermoplastic polyurethane (TPU), 94° shore A, dark gray, non-marking, non-staining, chemically bonded.
Wheel center: Impact-resistant nylon, natural white.
Bearing types: Ball bearing or ball bearing (C).
For more information refer to page 79

ALTH
Tread: High-quality polyurethane-elastomer Blickle Extrathane®, 92° shore A, light brown, non-marking, non-staining. Cast tread.
Wheel center: Die-cast aluminum.
Bearing type: Ball bearing.
For more information refer to page 82

ALST
Tread: High-quality polyurethane-elastomer Blickle Softhane®, 75° shore A, green, non-marking, non-staining. Cast tread.
Wheel center: Die-cast aluminum.
Bearing type: Ball bearing.
For more information refer to page 80

ALBS
Tread: High-quality polyurethane-elastomer Blickle Besthane® Soft, 75° shore A, blue, non-marking, non-staining. Cast tread.
Wheel center: Die-cast aluminum.
Bearing type: Ball bearing.
For more information refer to page 81

Swivel Casters	Rigid Casters	Swivel Casters with 'Stop-Fix' Brake	Wheel Ø [inch] [mm]	Wheel Width [inch] [mm]	Load Capacity [lbs] [kg]	Bearing Type	Total Height [inch] [mm]	Plate Size [inch]	Bolt Hole Spacing [inch]	For Mounting Bolt [inch]	Swivel Lead [inch]
LK/LE-POG Series											
LK-POG 82K-14	BKS-POG 82K-14	LK-POG 82K-14-FI	3 1/8 [80]	1 7/16 [37]	350 [160]	Ball bearing	4 3/8 [110]	4 x 4 1/2	2 5/8 x 3/8 / 3x3	3/8	1 1/16
LK-POG 100K-14	BKS-POG 100K-14	LK-POG 100K-14-FI	4 [100]	1 1/2 [37]	615 [280]	Ball bearing (C)	5 1/8 [130]	4 x 4 1/2	2 5/8 x 3/8 / 3x3	3/8	1 1/4
LK-POG 125K-14	BKS-POG 125K-14	LK-POG 125K-14-FI	5 [125]	1 9/16 [40]	660 [300]	Ball bearing (C)	6 1/8 [155]	4 x 4 1/2	2 5/8 x 3/8 / 3x3	3/8	1 3/8
LE-POG 150K-14	BES-POG 150K-14	LE-POG 150K-14-FI	6 [150]	2 [50]	660 [300]	Plain bore	7 1/2 [190]	4 x 4 1/2	2 5/8 x 3/8 / 3x3	3/8	2 1/8
LE-POG 200K-14	BES-POG 200K-14	LE-POG 200K-14-FI	8 [200]	2 [50]	660 [300]	Plain bore	9 1/4 [235]	4 x 4 1/2	2 5/8 x 3/8 / 3x3	3/8	2 1/2
LK/LE-PATH Series											
LK-PATH 80K-14-FK	BKS-PATH 80K-14-FK	LK-PATH 80K-14-FI-FK	3 1/8 [80]	1 1/4 [32]	330 [150]	Ball bearing (C)	4 3/8 [110]	4 x 4 1/2	2 5/8 x 3/8 / 3x3	3/8	1 1/16
LK-PATH 100K-14-FK	BKS-PATH 100K-14-FK	LK-PATH 100K-14-FI-FK	4 [100]	1 1/4 [32]	440 [200]	Ball bearing (C)	5 1/8 [130]	4 x 4 1/2	2 5/8 x 3/8 / 3x3	3/8	1 1/4
LK-PATH 125K-14-FK	BKS-PATH 125K-14-FK	LK-PATH 125K-14-FI-FK	5 [125]	1 1/4 [32]	550 [250]	Ball bearing (C)	6 1/8 [155]	4 x 4 1/2	2 5/8 x 3/8 / 3x3	3/8	1 1/2
LE-PATH 160K-14	BES-PATH 160K-14	LE-PATH 160K-14-FI	6 5/16 [160]	1 9/16 [40]	660 [300]	Ball bearing (C)	7 1/16 [195]	4 x 4 1/2	2 5/8 x 3/8 / 3x3	3/8	2 1/8
LE-PATH 200K-14	BES-PATH 200K-14	LE-PATH 200K-14-FI	8 [200]	1 9/16 [40]	660 [300]	Ball bearing (C)	9 1/4 [235]	4 x 4 1/2	2 5/8 x 3/8 / 3x3	3/8	2 1/2
LK/LE-POEV Series											
LK-POEV 82K-14-SG	BKS-POEV 82K-14-SG	LK-POEV 82K-14-FI-SG	3 1/8 [80]	1 9/16 [40]	375 [170]	Ball bearing (C)	4 3/8 [110]	4 x 4 1/2	2 5/8 x 3/8 / 3x3	3/8	1 1/16
LK-POEV 100K-14-SG	BKS-POEV 100K-14-SG	LK-POEV 100K-14-FI-SG	4 [100]	1 1/2 [38]	440 [200]	Ball bearing (C)	5 1/8 [130]	4 x 4 1/2	2 5/8 x 3/8 / 3x3	3/8	1 1/4
LK-POEV 125K-14-SG	BKS-POEV 125K-14-SG	LK-POEV 125K-14-FI-SG	5 [125]	1 9/16 [40]	550 [250]	Ball bearing (C)	6 1/8 [155]	4 x 4 1/2	2 5/8 x 3/8 / 3x3	3/8	1 1/2
LE-POEV 160K-14-SG	BES-POEV 160K-14-SG	LE-POEV 160K-14-FI-SG	6 5/16 [160]	2 [50]	660 [300]	Ball bearing	7 1/16 [195]	4 x 4 1/2	2 5/8 x 3/8 / 3x3	3/8	2 1/8
LE-POEV 200K-14-SG	BES-POEV 200K-14-SG	LE-POEV 200K-14-FI-SG	8 [200]	2 [50]	660 [300]	Ball bearing	9 1/4 [235]	4 x 4 1/2	2 5/8 x 3/8 / 3x3	3/8	2 1/2
LK/LE-ALEV Series											
LK-ALEV 100K-14	BKS-ALEV 100K-14	LK-ALEV 100K-14-FI	4 [100]	1 9/16 [40]	440 [200]	Ball bearing	5 1/8 [130]	4 x 4 1/2	2 5/8 x 3/8 / 3x3	3/8	1 1/4
LK-ALEV 125K-14	BKS-ALEV 125K-14	LK-ALEV 125K-14-FI	5 [125]	1 9/16 [40]	550 [250]	Ball bearing	6 1/8 [155]	4 x 4 1/2	2 5/8 x 3/8 / 3x3	3/8	1 1/2
LE-ALEV 150K-14	BES-ALEV 150K-14	LE-ALEV 150K-14-FI	6 [150]	2 [50]	660 [300]	Ball bearing	7 1/2 [190]	4 x 4 1/2	2 5/8 x 3/8 / 3x3	3/8	2 1/8
LE-ALEV 200K-14	BES-ALEV 200K-14	LE-ALEV 200K-14-FI	8 [200]	2 [50]	660 [300]	Ball bearing	9 1/4 [235]	4 x 4 1/2	2 5/8 x 3/8 / 3x3	3/8	2 1/2

Swivel Casters	Rigid Casters	Swivel Casters with 'Stop-Fix' Brake	Wheel Ø [inch] [mm]	Wheel Width [inch] [mm]	Load Capacity [lbs] [kg]	Bearing Type	Total Height [inch] [mm]	Plate Size [inch]	Bolt Hole Spacing [inch]	For Mounting Bolt [inch]	Swivel Lead [inch]
LK/LE-POTH Series											
LK-POTH 100K-14	BKS-POTH 100K-14	LK-POTH 100K-14-FI	4 [100]	1 3/8 [35]	660 [300]	Ball bearing (C)	5 1/8 [130]	4 x 4 1/2	2 5/8 x 3/8 / 3x3	3/8	1 3/4
LK-POTH 125K-14	BKS-POTH 125K-14	LK-POTH 125K-14-FI	5 [125]	1 9/16 [40]	770 [350]	Ball bearing (C)	6 1/8 [155]	4 x 4 1/2	2 5/8 x 3/8 / 3x3	3/8	1 7/8
LE-POTH 150K-14	BES-POTH 150K-14	LE-POTH 150K-14-FI	6 [150]	1 3/4 [45]	660 [300]	Ball bearing	7 1/2 [190]	4 x 4 1/2	2 5/8 x 3/8 / 3x3	3/8	2 1/8
LE-POTH 200K-14	BES-POTH 200K-14	LE-POTH 200K-14-FI	8 [200]	2 [50]	660 [300]	Ball bearing	9 1/4 [235]	4 x 4 1/2	2 5/8 x 3/8 / 3x3	3/8	2 1/2
LK/LE-ALTH Series											
LK-ALTH 100K-14	BKS-ALTH 100K-14	LK-ALTH 100K-14-FI	4 [100]	1 9/16 [40]	550 [250]	Ball bearing	5 1/8 [130]	4 x 4 1/2	2 5/8 x 3/8 / 3x3	3/8	1 3/4
LK-ALTH 125K-14	BKS-ALTH 125K-14	LK-ALTH 125K-14-FI	5 [125]	1 9/16 [40]	770 [350]	Ball bearing	6 1/8 [155]	4 x 4 1/2	2 5/8 x 3/8 / 3x3	3/8	1 7/8
LE-ALTH 150K-14	BES-ALTH 150K-14	LE-ALTH 150K-14-FI	6 [150]	2 [50]	660 [300]	Ball bearing	7 1/2 [190]	4 x 4 1/2	2 5/8 x 3/8 / 3x3	3/8	2 1/8
LE-ALTH 200K-14	BES-ALTH 200K-14	LE-ALTH 200K-14-FI	8 [200]	2 [50]	660 [300]	Ball bearing	9 1/4 [235]	4 x 4 1/2	2 5/8 x 3/8 / 3x3	3/8	2 1/2
LK/LE-ALST Series											
LK-ALST 100K-14	BKS-ALST 100K-14	LK-ALST 100K-14-FI	4 [100]	1 9/16 [40]	660 [300]	Ball bearing	5 1/8 [130]	4 x 4 1/2	2 5/8 x 3/8 / 3x3	3/8	1 3/4
LK-ALST 125K-14	BKS-ALST 125K-14	LK-ALST 125K-14-FI	5 [125]	1 9/16 [40]	770 [350]	Ball bearing	6 1/8 [155]	4 x 4 1/2	2 5/8 x 3/8 / 3x3	3/8	1 7/8
LE-ALST 150K-14	BES-ALST 150K-14	LE-ALST 150K-14-FI	6 [150]	2 [50]	660 [300]	Ball bearing	7 1/2 [190]	4 x 4 1/2	2 5/8 x 3/8 / 3x3	3/8	2 1/8
LE-ALST 150K-14-CO *	BES-ALST 150K-14-CO *	LE-ALST 150K-14-FI-CO *	6 [150]	2 [50]	660 [300]	Ball bearing	7 1/2 [190]	4 x 4 1/2	2 5/8 x 3/8 / 3x3	3/8	2 1/8
LE-ALST 200K-14	BES-ALST 200K-14	LE-ALST 200K-14-FI	8 [200]	2 [50]	660 [300]	Ball bearing	9 1/4 [235]	4 x 4 1/2	2 5/8 x 3/8 / 3x3	3/8	2 1/2
LE-ALST 200K-14-CO *	BES-ALST 200K-14-CO *	LE-ALST 200K-14-FI-CO *	8 [200]	2 [50]	660 [300]	Ball bearing	9 1/4 [235]	4 x 4 1/2	2 5/8 x 3/8 / 3x3	3/8	2 1/2
LK/LE-ALBS Series											
LK-ALBS 100K-14	BKS-ALBS 100K-14	LK-ALBS 100K-14-FI	4 [100]	1 9/16 [40]	660 [300]	Ball bearing	5 1/8 [130]	4 x 4 1/2	2 5/8 x 3/8 / 3x3	3/8	1 3/4
LK-ALBS 125K-14	BKS-ALBS 125K-14	LK-ALBS 125K-14-FI	5 [125]	1 9/16 [40]	770 [350]	Ball bearing	6 1/8 [155]	4 x 4 1/2	2 5/8 x 3/8 / 3x3	3/8	1 7/8
LE-ALBS 150K-14	BES-ALBS 150K-14	LE-ALBS 150K-14-FI	6 [150]	2 [50]	660 [300]	Ball bearing	7 1/2 [190]	4 x 4 1/2	2 5/8 x 3/8 / 3x3	3/8	2 1/8
LE-ALBS 150K-14-CO *	BES-ALBS 150K-14-CO *	LE-ALBS 150K-14-FI-CO *	6 [150]	2 [50]	660 [300]	Ball bearing	7 1/2 [190]	4 x 4 1/2	2 5/8 x 3/8 / 3x3	3/8	2 1/8
LE-ALBS 200K-14	BES-ALBS 200K-14	LE-ALBS 200K-14-FI	8 [200]	2 [50]	660 [300]	Ball bearing	9 1/4 [235]	4 x 4 1/2	2 5/8 x 3/8 / 3x3	3/8	2 1/2
LE-ALBS 200K-14-CO *	BES-ALBS 200K-14-CO *	LE-ALBS 200K-14-FI-CO *	8 [200]	2 [50]	660 [300]	Ball bearing	9 1/4 [235]	4 x 4 1/2	2 5/8 x 3/8 / 3x3	3/8	2 1/2

Options

Product code suffix	-ST	-CS7/16"/ -CS11	RI-04.14	-FS	-FS	-FA	-ELS	-SG-AS	-AS	LK-POW series	LK-POEV series	POES / ALES series	LIK / LIE series	More Options with this Bolt Hole Pattern
Available for	Consult factory	Consult factory	All sizes	Consult factory	Consult factory	Consult factory	Consult factory	ALEV series Consult factory	ALTH, ALST series Consult factory	Consult factory	Consult factory	Consult factory	Consult factory	Refer to page 54/55/56/57

European standard

US-standard

* Available with 7/16" or 11 mm switch cam
** Only for swivel casters without 'stop-fix' brake *** Load capacity of the wheel is reduced by 35 % to guarantee conductivity.

* With extra crowned running tread