

Wheel series

[illegible]



Wheels and tyres for forklift trucks and pallet trucks

Series: RTH, REV

**Wheels for pallet trucks,
drive and running wheels
for forklift trucks**




RTH series: Tread made of Blickle Extrathane® polyurethane, colour light brown, non-marking, 92° shore A, elastic, particularly high rebound resilience with long endurance times, abrasion-resistant, high cut and tear propagation resistance, non-staining, floor-saving, low-noise operation, low rolling resistance.
The tread is firmly bonded onto the wheel centre or the steel ring.

REV series: Elastic solid rubber tyres, colour black or non-marking grey, low abrasion, firmly pressed or vulcanised onto the cast iron wheel centre or the steel ring.

Detailed description: Page 54.



Atlet	BT	BT	BT	BT	BT
Ref. No.	Ref. No.	Ref. No.	Ref. No.	Ref. No.	Ref. No.
RTH 255x75/80-4	RTH 300x100/230-N	RTH 300x100/230-N-GL	REV 300x100/230-N	RTH 260x90/186-3-N	REV 260x90/186-3-N
Suitable for manufacturer No.	Suitable for manufacturer No.	Suitable for manufacturer No.	Suitable for manufacturer No.	Suitable for manufacturer No.	Suitable for manufacturer No.
78120	36564	CR 36564	42285	47466	58888

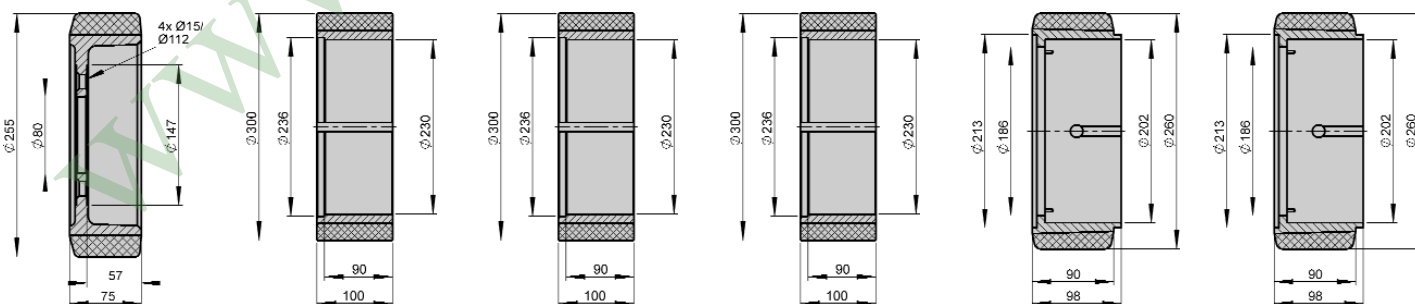

For further types, refer to the following pages.

Variants / Accessories

Further dimensions upon request

Series: RTH, REV

**Wheels for pallet trucks,
drive and running wheels
for forklift trucks**




RTH series: Blickle Extrathane® tread, colour light brown, non-marking, 92° shore A, elastic, particularly high rebound resilience with long endurance times, abrasion-resistant, high cut and tear propagation resistance, non-staining, floor-saving, low-noise operation, low rolling resistance. The tread is firmly bonded onto the wheel centre or the steel ring.

REV series: Elastic solid rubber tyres, colour black or non-marking grey, low abrasion, firmly pressed or vulcanised onto the cast iron wheel centre or the steel ring.

Detailed description: Page 54.



BT	BT	BT	BT	BT	BT
Ref. No.	Ref. No.	Ref. No.	Ref. No.	Ref. No.	Ref. No.
RTH 300x100/90x28	REV 215x82/60-5-SG	RTH 215x82/60-5	REV 215x82/60-5	RTH 230x110/80x25	RTH 250x75/80-5
Suitable for manufacturer No.	Suitable for manufacturer No.	Suitable for manufacturer No.	Suitable for manufacturer No.	Suitable for manufacturer No.	Suitable for manufacturer No.
74559	127352	129920	129938	133862	138457

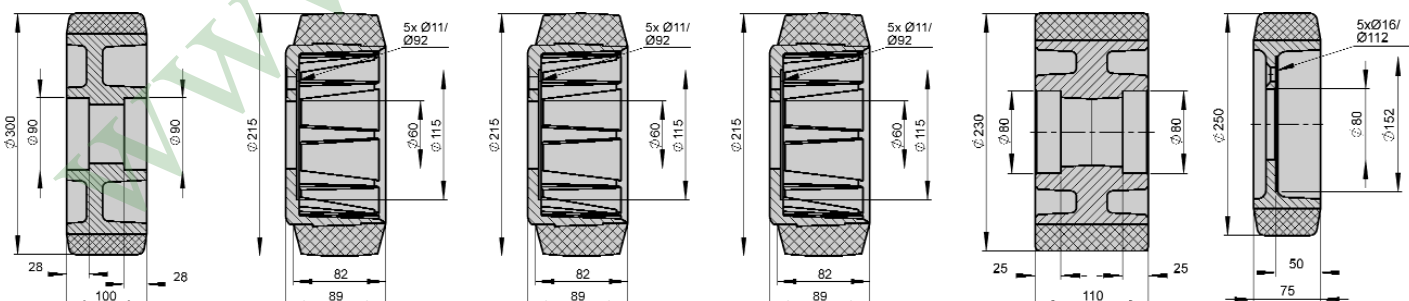

For further types, refer to the following pages.

Variants / Accessories

Further dimensions upon request

Series: RTH, REV

Wheels for pallet trucks, drive and running wheels for forklift trucks




RTH series: Blickle Extrathane® polyurethane tread, colour light brown, non-marking, 92° shore A, elastic, particularly high rebound resilience with long endurance times, abrasion-resistant, high cut and tear propagation resistance, non-staining, floor-saving, low-noise operation, low rolling resistance. The tread is firmly bonded onto the wheel centre or the steel ring.

REV series: Elastic solid rubber tyres, colour black or non-marking grey, low abrasion, firmly pressed or vulcanised onto the cast iron wheel centre or the steel ring.

Detailed description: Page 54.



BV	BV	BV	BV	Fenwick	Fenwick
Ref. No.	Ref. No.	Ref. No.	Ref. No.	Ref. No.	Ref. No.
RTH 230x85/161-N	RTH 230x70/45-5+3	REV 230x70/45-5+3	RTH 230x75/80-6	RTH 230x90/30-6	RTH 230x90/30-6-GL
Suitable for manufacturer No.	Suitable for manufacturer No.	Suitable for manufacturer No.	Suitable for manufacturer No.	Suitable for manufacturer No.	Suitable for manufacturer No.
3010177	3070053	3070056	3070068	3305880	3305883

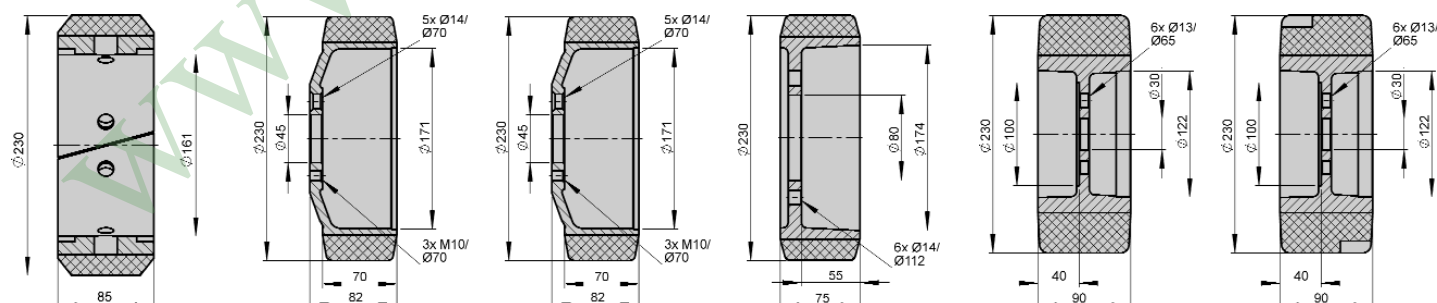

For further types, refer to the following pages.

Variants / Accessories

Further dimensions upon request

RTH, RVU, REV

**Wheels for pallet trucks,
drive and running wheels
for forklift trucks**








RTH, RVU series: Blickle Extrathane® polyurethane or Vulkollan® tread, colour light brown, non-marking, 92° shore A, elastic, particularly high rebound resilience with long endurance times, abrasion-resistant, high cut and tear propagation resistance, non-staining, floor-saving, low-noise operation, low rolling resistance. The tread is firmly bonded onto the wheel centre or the steel ring.

REV series: Elastic solid rubber tyres, colour black or non-marking grey, low abrasion, firmly pressed or vulcanised onto the cast iron wheel centre or the steel ring.

Detailed description: Page 54.



Fenwick	Jungheinrich	Jungheinrich	Jungheinrich	Jungheinrich	Jungheinrich
Ref. No.	Ref. No.	Ref. No.	Ref. No.	Ref. No.	Ref. No.
REV 230x90/30-6	RTH 285x100/75x27	RVU 343x114/80-7	RVU 343x140/80-7	RTH 200x85/50-4+2	REV 230x70/45-5+3
Suitable for manufacturer No.	Suitable for manufacturer No.	Suitable for manufacturer No.	Suitable for manufacturer No.	Suitable for manufacturer No.	Suitable for manufacturer No.
5803581	6313138	6313503	63145890	6315408	6319050

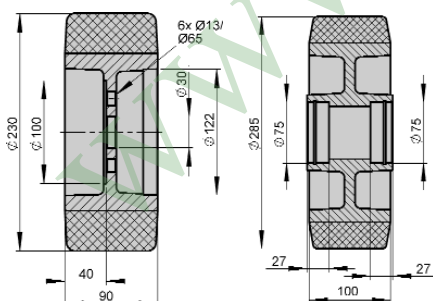

For further types, refer to the following pages.

Variants / Accessories

Further dimensions upon request

Series: RTH, REV

Wheels for pallet trucks, drive and running wheels for forklift trucks




RTH series: Blickle Extrathane® polyurethane tread, colour light brown, non-marking, 92° shore A, elastic, particularly high rebound resilience with long endurance times, abrasion-resistant, high cut and tear propagation resistance, non-staining, floor-saving, low-noise operation, low rolling resistance. The tread is firmly bonded onto the wheel centre or the steel ring.

REV series: Elastic solid rubber tyres, colour black or non-marking grey, low abrasion, firmly pressed or vulcanised onto the cast iron wheel centre or the steel ring.

Detailed description: Page 54.



Jungheinrich	Jungheinrich	Jungheinrich	Jungheinrich	Jungheinrich	Jungheinrich
Ref. No.	Ref. No.	Ref. No.	Ref. No.	Ref. No.	Ref. No.
RTH 230x70/45-5+3	REV 250x80/30-90-N	RTH 250x80/30-90N-GL	RTH 230x85/50-4-GL	RTH 250x80/50-4-GL	REV 230x85/50-4
Suitable for manufacturer No.	Suitable for manufacturer No.	Suitable for manufacturer No.	Suitable for manufacturer No.	Suitable for manufacturer No.	Suitable for manufacturer No.
6321059	7130113	7130776	7134004	7134060	7134268

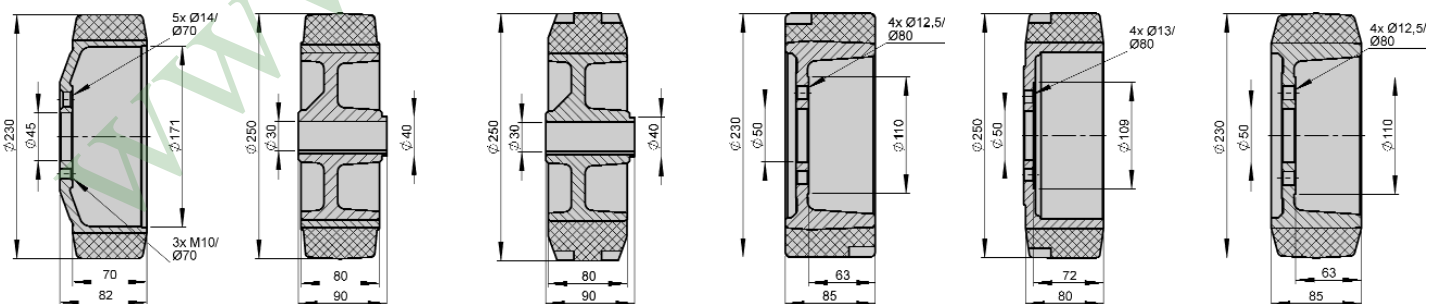

For further types, refer to the following pages.

Variants / Accessories

Further dimensions upon request

Series: RTH, REV

**Wheels for pallet trucks,
drive and running wheels
for forklift trucks**




RTH series: Blickle Extrathane® polyurethane tread, colour light brown, non-marking, 92° shore A, elastic, particularly high rebound resilience with long endurance times, abrasion-resistant, high cut and tear propagation resistance, non-staining, floor-saving, low-noise operation, low rolling resistance. The tread is firmly bonded onto the wheel centre or the steel ring.

REV series: Elastic solid rubber tyres, colour black or non-marking grey, low abrasion, firmly pressed or vulcanised onto the cast iron wheel centre or the steel ring.

Detailed description: Page 54.



Jungheinrich	Jungheinrich	Jungheinrich	Kentruck	Linde	Linde
Ref. No.	Ref. No.	Ref. No.	Ref. No.	Ref. No.	Ref. No.
RTH 220x85/30-90-N	RTH 230x82/45-5+3	RTH 230x80/65-4-75SH	RTH 260x85/202	RTH 230x90/30-6	REV 230x90/30-6
Suitable for manufacturer No.	Suitable for manufacturer No.	Suitable for manufacturer No.	Suitable for manufacturer No.	Suitable for manufacturer No.	Suitable for manufacturer No.
60054142	63215600	77800067	768005	39902320	39902325

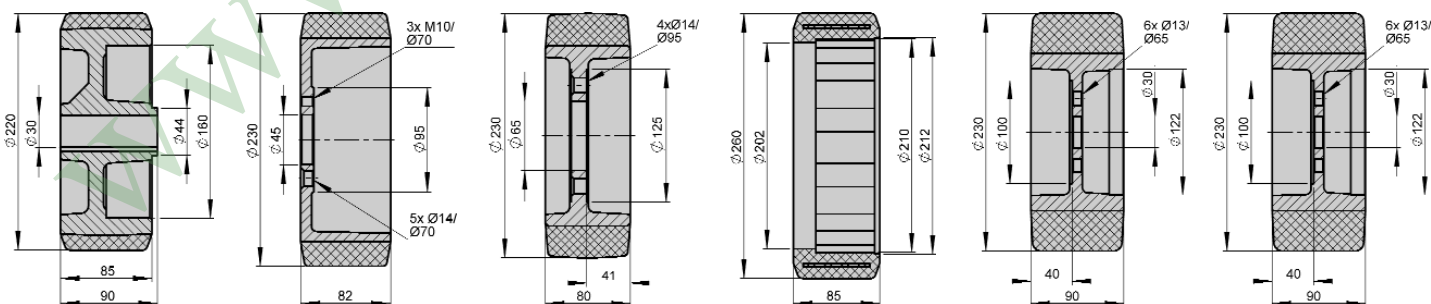

For further types, refer to the following pages.

Variants / Accessories

Further dimensions upon request

Series: RTH, REV

**Wheels for pallet trucks,
drive and running wheels
for forklift trucks**


RTH series: Blickle Extrathane® polyurethane tread, colour light brown, non-marking, 92° shore A, elastic, particularly high rebound resilience with long endurance times, abrasion-resistant, high cut and tear propagation resistance, non-staining, floor-saving, low-noise operation, low rolling resistance. The tread is firmly bonded onto the wheel centre or the steel ring.

REV series: Elastic solid rubber tyres, colour black or non-marking grey, low abrasion, firmly pressed or vulcanised onto the cast iron wheel centre or the steel ring.

Detailed description: Page 54.



Loc	Loc	Loc	Manusur	Mic	Mic
Ref. No.	Ref. No.	Ref. No.	Ref. No.	Ref. No.	Ref. No.
RTH 210x65/162	RTH 270x90/157-12	RTH 270x90/213	RTH 270x90/213	REV 250x80/30-90-N	RTH 250x80/30-90N-GL
Suitable for manufacturer No.	Suitable for manufacturer No.	Suitable for manufacturer No.	Suitable for manufacturer No.	Suitable for manufacturer No.	Suitable for manufacturer No.
539074	539134	539173	8245151-04	28862	45636

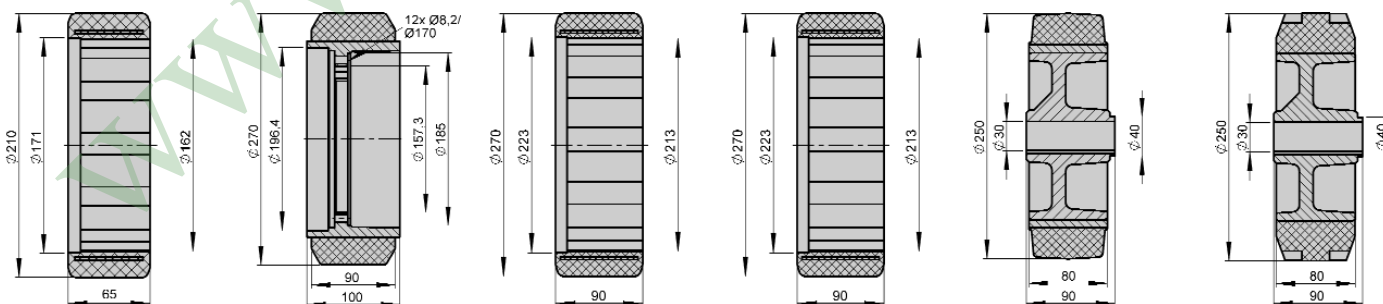

For further types, refer to the following pages.

Variants / Accessories

Further dimensions upon request

Series: RTH, REV

**Wheels for pallet trucks,
drive and running wheels
for forklift trucks**




RTH series: Blickle Extrathane® polyurethane tread, colour light brown, non-marking, 92° shore A, elastic, particularly high rebound resilience with long endurance times, abrasion-resistant, high cut and tear propagation resistance, non-staining, floor-saving, low-noise operation, low rolling resistance. The tread is firmly bonded onto the wheel centre or the steel ring.

REV series: Elastic solid rubber tyres, colour black or non-marking grey, low abrasion, firmly pressed or vulcanised onto the cast iron wheel centre or the steel ring.

Detailed description: Page 54.



Mic	Mic	Mic	Mic	Mic	Mic
Ref. No.	Ref. No.	Ref. No.	Ref. No.	Ref. No.	Ref. No.
RTH 220x85/30-90-N	RTH 250x80/50-4-GL	RTH 230x85/50-4-GL	REV 230x85/50-4	RTH 270x95/157-12	RTH 200x85/50-4+2
Suitable for manufacturer No.	Suitable for manufacturer No.	Suitable for manufacturer No.	Suitable for manufacturer No.	Suitable for manufacturer No.	Suitable for manufacturer No.
54142	55348	58259	58269	200117240	506318547

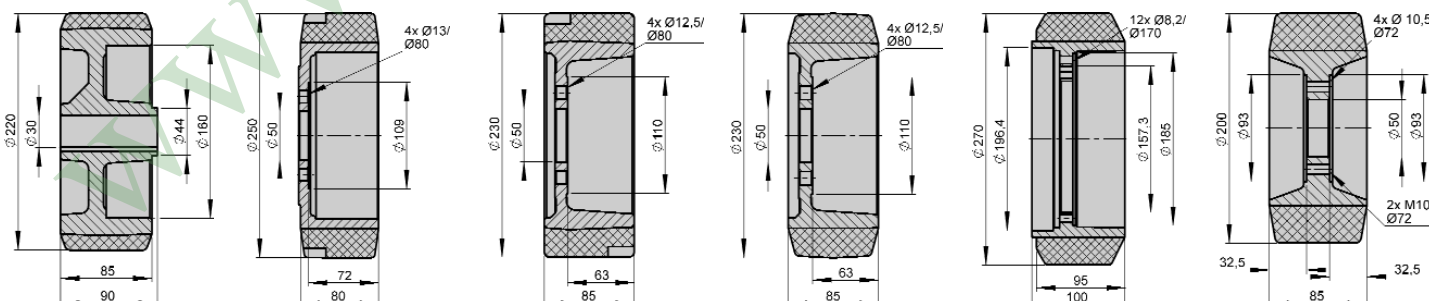

For further types, refer to the following pages.

Variants / Accessories

Further dimensions upon request

Series: RTH, REV

Wheels for pallet trucks, drive and running wheels for forklift trucks


RTH series: Blickle Extrathane® polyurethane tread, colour light brown, non-marking, 92° shore A, elastic, particularly high rebound resilience with long endurance times, abrasion-resistant, high cut and tear propagation resistance, non-staining, floor-saving, low-noise operation, low rolling resistance. The tread is firmly bonded onto the wheel centre or the steel ring.

REV series: Elastic solid rubber tyres, colour black or non-marking grey, low abrasion, firmly pressed or vulcanised onto the cast iron wheel centre or the steel ring.

Detailed description: Page 54.



OMG	Pimespo	Pimespo	Pimespo	Prat	Prat
Ref. No.	Ref. No.	Ref. No.	Ref. No.	Ref. No.	Ref. No.
RTH 245x100/30-6-GL	RTH 250x80/80-5-PI	RTH 230x75/80-6	RTH 230x70/45-5+3	RTH 230x72/10-6-P	REV 230x72/10-6-P
Suitable for manufacturer No.	Suitable for manufacturer No.	Suitable for manufacturer No.	Suitable for manufacturer No.	Suitable for manufacturer No.	Suitable for manufacturer No.
420.10.30.30	81504005	95309172	95309393	55667	55668

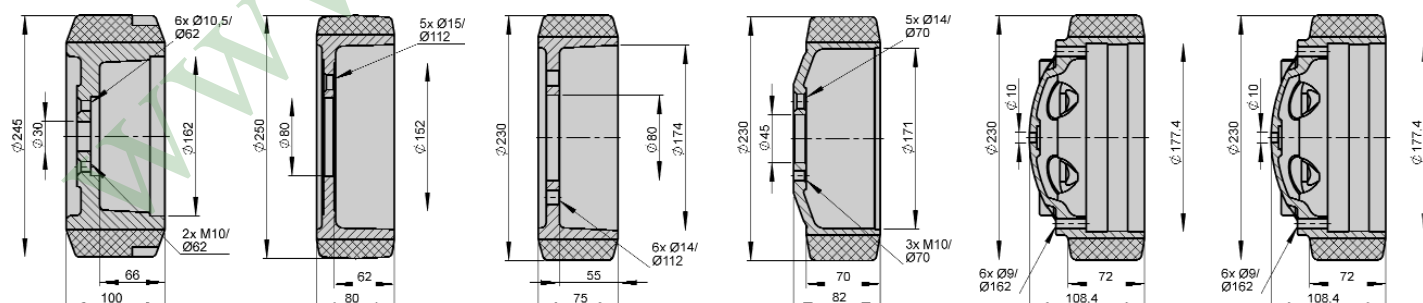

For further types, refer to the following pages.

Variants / Accessories

Further dimensions upon request

Series: RTH, REV

Wheels for pallet trucks, drive and running wheels for forklift trucks




RTH series: Blickle Extrathane® polyurethane tread, colour light brown, non-marking, 92° shore A, elastic, particularly high rebound resilience with long endurance times, abrasion-resistant, high cut and tear propagation resistance, non-staining, floor-saving, low-noise operation, low rolling resistance. The tread is firmly bonded onto the wheel centre or the steel ring.

REV series: Elastic solid rubber tyres, colour black or non-marking grey, low abrasion, firmly pressed or vulcanised onto the cast iron wheel centre or the steel ring.

Detailed description: Page 54.



Prat	Prat	Rocla	Steinbock	Still	Still
Ref. No.	Ref. No.	Ref. No.	Ref. No.	Ref. No.	Ref. No.
RTH 225x70/120-12-P	REV 225x70/120-12-P	RTH 270x90/211	RTH 270x90/211	RTH 230x75/45-5	RTH 230x85/50-4
Suitable for manufacturer No.	Suitable for manufacturer No.	Suitable for manufacturer No.	Suitable for manufacturer No.	Suitable for manufacturer No.	Suitable for manufacturer No.
68352	68353	509937	29093	359920	5453866

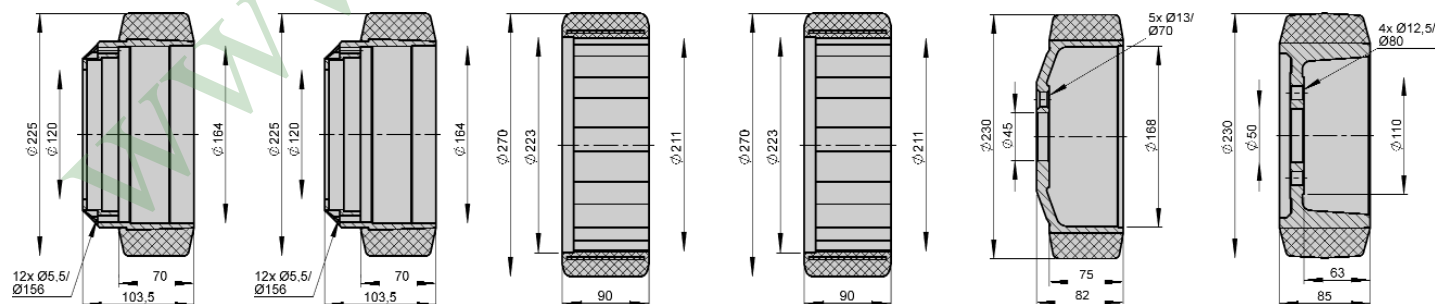

For further types, refer to the following page.

Variants / Accessories

Further dimensions upon request

RTH, RVU, REV

**Wheels for pallet trucks,
drive and running wheels
for forklift trucks**




RTH, RVU series: Blickle Extrathane® polyurethane or Vulkollan® tread, colour light brown, non-marking, 92° shore A, elastic, particularly high rebound resilience with long endurance times, abrasion-resistant, high cut and tear propagation resistance, non-staining, floor-saving, low-noise operation, low rolling resistance. The tread is firmly bonded onto the wheel centre or the steel ring.

REV series: Elastic solid rubber tyres, colour black or non-marking grey, low abrasion, firmly pressed or vulcanised onto the cast iron wheel centre or the steel ring.

Detailed description: Page 54.



Still	Still	Stöcklin	Wagner	Wagner	Wagner
Ref. No.	Ref. No.	Ref. No.	Ref. No.	Ref. No.	Ref. No.
RTH 230x85/50-4-GL	REV 230x85/50-4	RTH 255x83/80-5	RTH 255x83/80-5	RVU 300x100/80-5	RTH 230x75/45-5
Suitable for manufacturer No.	Suitable for manufacturer No.	Suitable for manufacturer No.	Suitable for manufacturer No.	Suitable for manufacturer No.	Suitable for manufacturer No.
5453870	5453874	360503	305061	334295	359920

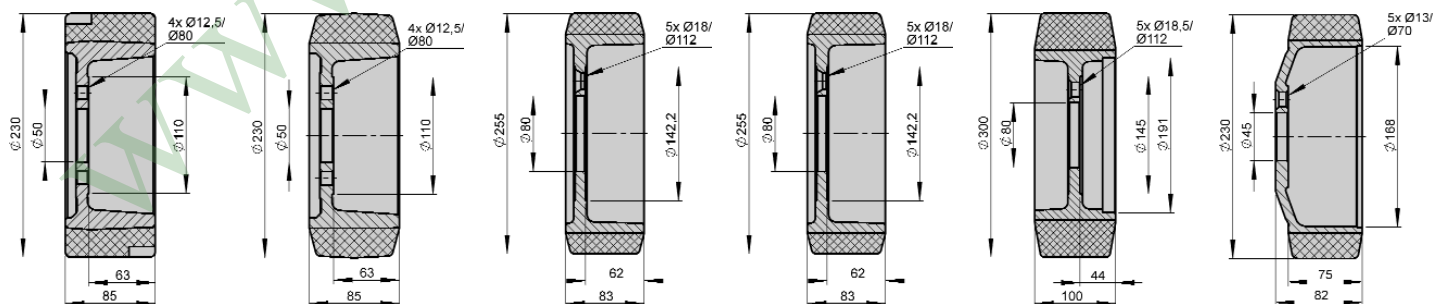

Variants / Accessories

Further dimensions upon request

Series: BTH

Press-on bands with Blickle Extrathane® polyurethane tread

 520 - 2875 kg


Made of Blickle Extrathane® polyurethane, firmly bonded onto steel ring, colour light brown, non-marking, 92° shore A, elastic, abrasion-resistant, high cut and tear propagation resistance, non-staining, floor-saving, low-noise operation, low rolling resistance, very good chemical connection with the steel ring.

Detailed description: Page 55.

Press-on bands

Ref. No.	External Ø (D) [mm]	Width (T2) [mm]	Internal Ø (d) [mm]	Profile	Load capacity [kg]
BTH 125x50/75	125	50	75	Flat profile	520
BTH 150x50/100	150	50	100	Flat profile	620
BTH 150x75/100	150	75	100	Flat profile	935
BTH 180x50/120	180	50	120	Flat profile	720
BTH 180x75/120	180	75	120	Flat profile	1080
BTH 200x50/140	200	50	140	Flat profile	800
BTH 200x75/100	200	75	100	Flat profile	1040
BTH 225x100/145	225	100	145	Flat profile	1800
BTH 230x85/170	230	85	170	Flat profile	1565
BTH 230x85/170-GL	230	85	170	Cross-country profile	1565
BTH 250x60/190	250	60	190	Flat profile	1200
BTH 250x80/170	250	80	170	Flat profile	1495
BTH 250x80/170-GL	250	80	170	Cross-country profile	1495
BTH 250x130/140	250	130	140	Flat profile	2175
BTH 254x127/165	254 (10")	127 (5")	165,1 (6,5")	Flat profile	2330
BTH 267x89/203	267 (10,5")	88,9 (3,5")	203,2 (8")	Flat profile	1875
BTH 285x75/220	285	75	220	Flat profile	1685
BTH 285x100/200	285	100	200	Flat profile	2090
BTH 285x100/228	285	100	228	Flat profile	2100
BTH 290x105/185	290	105	185	Flat profile	2075
BTH 300x90/203	300	90	203	Flat profile	1895
BTH 343x115/245	343	115	245	Flat profile	2755
BTH 350x110/270	350	110	270	Flat profile	2875
BTH 415x100/305	415	100	305	Flat profile	2775

Variants / Accessories




Further dimensions

Technical description page


Ref. No. extension

Upon request

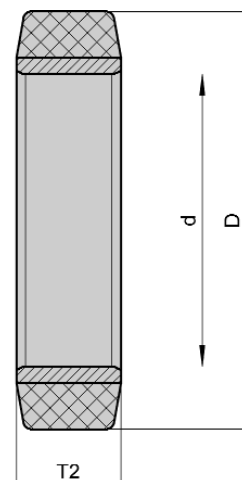

Series: BEV

Press-on bands with elastic solid rubber tread

 160 - 3100 kg


Elastic solid rubber press-on bands in smooth rolling quality with steel insert (ZDG) or in drive quality, vulcanised onto steel ring (ZST), colour black, wear-resistant, floor-saving, high operational comfort, low rolling resistance.
Detailed description: Page 55.


Press-on bands with steel insert (ZDG)	Press-on bands on steel ring (ZST)	External Ø (D) [mm]	Width (T2) [mm]	Internal Ø (d) [mm]	Load capacity [kg]
BEV 125x50/75-ZDG		125	50	75	160
BEV 160x50/100-ZDG		160	50	100	250
BEV 200x50/140-ZDG	BEV 200x50/140-ZST	200	50	140	350
BEV 250x60/190-ZDG	BEV 250x60/190-ZST	250	60	190	525
BEV 250x80/170-ZDG	BEV 250x80/170-ZST	250	80	170	675
	BEV 250x130/140-ZST	250	130	140	975
	BEV 285x75/220-ZST	285	75	220	725
BEV 300x75/220-ZDG		300	75	220	750
BEV 300x90/203-ZDG		300	90	203	900
	BEV 300x100/203-ZST	300	100	203	975
BEV 360x60/270-ZDG		360	60	270	750
BEV 360x75/270-ZDG		360	75	270	950
BEV 360x85/270-ZDG		360	85	270	1050
BEV 400x75/305-ZDG		400	75	305	1000
BEV 405x130/305-ZDG	BEV 405x130/305-ZST	405	130	305	1500
	BEV 425x150/305-ZST	425	150	305	1800
	BEV 520x120/370-ZST	520	120	370	1775
	BEV 550x160/410-ZST	550	160	410	2250
BEV 645x200/480-ZDG		645	200	480	3100

Variants / Accessories




	With non-marking tyre	Further dimensions and versions
Technical description page	55	
Ref. No. extension	-SN	
	Upon request	Upon request


ZDG

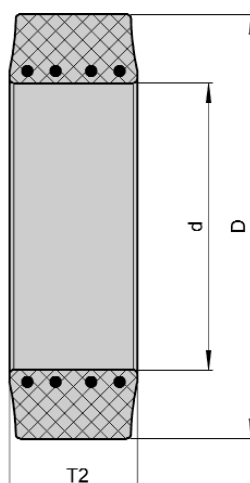

ZST

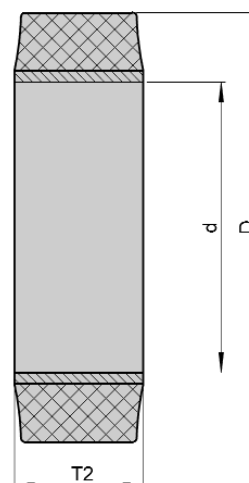

Series: BSEV

Super-elastic solid rubber tyres
 195 - 2920 kg


This 3-component tyre consists of:

Rubber core: Steel cores embedded in a tough and hard rubber compound to ensure a tight tyre seat on the rim.

Cushion layer: Ensures impact and vibration absorption, which protects the transport equipment and goods, has low rolling resistance and minimum energy consumption.

Tread: The thick, abrasion-resistant tread gives long service life. With zig-zag or ribbed profile (-RP).

Version CIT for rims without fixing parts.

Detailed description: Page 55.



Tyre		Tyre CIT design					
Ref. No.	Ref. No.	Tyre Ø (D) [mm]	Tyre width (T2) [mm]	Tyre designation	Rim dimension	Load cap. with 6 km/h [kg]	Load cap. with 25 km/h [kg]
BSEV 3.00-4-RP		250	85	3.00-4	2.10-4	260	195
BSEV 3.00-4		250	85	3.00-4	2.10-4	260	195
BSEV 3.00-4/2.50-4		250	85	3.00-4	2.50C-4	300	195
BSEV 4.00-4-RP		306	105	4.00-4	2.50C-4	535	400
BSEV 4.00-4		306	105	4.00-4	2.50C-4	535	400
BSEV 4.00-8-RP		405	105	4.00-8	3.00D-8	950	730
BSEV 4.00-8	BSEV 4.00-8-CIT	405	105	4.00-8	3.00D-8	950	730
BSEV 18x7-8	BSEV 18x7-8-CIT	453	178	18x7-8	4.33R-8	2145	1650
BSEV 5.00-8	BSEV 5.00-8-CIT	455	120	5.00-8	3.00D-8	1415	1090
BSEV 6.00-9	BSEV 6.00-9-CIT	525	140	6.00-9	4.00E-9	1885	1450
BSEV 7.00-12	BSEV 7.00-12-CIT	657	178	7.00-12	5.00S-12	2920	2240

* Refer to the detailed description on page 42.

Variants / Accessories


	With non-marking tyre	Further dimensions and versions
Technical description page	55	
Ref. No. extension	-SN	
	Upon request	Upon request

