

RHOMBUS



391



- APPLICATIONS**
- Care beds
 - Hospital beds
 - Intensive care beds
 - OR beds and tables
 - Stretchers
 - Gurneys
 - Ultrasonic Equipment

- FEATURES**
- Improved braking system in swivel and wheel
 - Precision bearings in raceway
 - Precision bearings in 35K wheel; flange bearing in 32C wheel
 - Caster meets ISO Standard 22882: 2004 Caster & Wheels - Requirements for Casters for Hospital Beds
 - New central-locking brake design has: Very Positive swivel lock - operates independently of the wheel brake, reducing wear and tendency to ratchet
 - Wheel brake can be applied dynamically without damage to mechanism
 - Factory-set mechanism, maintenance-free for the life of the caster
 - Stem with M8 fixing holes to suit all bed layouts and reduce stock holding

▼ PEDAL SETTINGS

The central locking stem allows a central pedal to select three modes of operation:

- 1: Motion straight ahead (only when equipped with position lock mode)
- 2: Changes of direction: free mobility of all casters
- 3: Full locking of all four casters

▼ WHEEL OPTIONS



35K TPR
(in chart at right)



35K Electrically Conductive TPR
(To order change R to A)



32C Natural rubber on steel rim
(in chart at right)



32C Electrically conductive natural rubber on steel rim
(To order change B to A)

RHOMBUS




391

Wheel Diameter Inches (mm)	Tread Width Inches (mm)	Wheel Description	Capacity (Lbs)	Load Height Inches (mm)	Swivel Radius Inches (mm)	Wheel Bearing	Model Number
CENTRAL LOCKING TOTAL LOCK MODELS							
4	1-1/4"/32	35K TPR	220	5-1/2"/139	3-11/16"/92	Precision Ball	391Q 35K 100 RZ
4	1-1/4"/32	32C Rubber on steel	220	5-1/2"/139	3-11/16"/92	Flange Bearing	391Q 32C 100 BZ
5	1-1/4"/32	35K TPR	220	6-7/16"/164	4-7/16"/107	Precision Ball	391Q 35K 125 RZ
5	1-1/4"/32	32C Rubber on steel	220	6-7/16"/164	4-7/16"/107	Flange Bearing	391Q 32C 125 BZ
6	1-1/4"/32	35K TPR	264	7-1/2"/191	4-15/16"/126	Precision Ball	391Q 35K 150 RZ
6	1-1/4"/32	32C Rubber on steel	264	7-1/2"/191	4-15/16"/126	Flange Bearing	391Q 32C 150 BZ
8	1-1/4"/32	35K TPR	264	9-9/16"/243	6-5/16"/161	Precision Ball	391Q 35K 200 RZ
8	1-1/4"/32	32C Rubber on steel	264	9-9/16"/243	6-5/16"/161	Flange Bearing	391Q 32C 200 BZ

CENTRAL LOCKING DIRECTIONAL AND TOTAL LOCK COMBO							
4	1-1/4"/32	35K TPR	220	5-1/2"/139	3-11/16"/92	Precision Ball	391R 35K 100 RZ
4	1-1/4"/32	32C Rubber on steel	220	5-1/2"/139	3-11/16"/92	Flange Bearing	391R 32C 100 BZ
5	1-1/4"/32	35K TPR	220	6-7/16"/164	4-7/16"/107	Precision Ball	391R 35K 125 RZ
5	1-1/4"/32	32C Rubber on steel	220	6-7/16"/164	4-7/16"/107	Flange Bearing	391R 32C 125 BZ
6	1-1/4"/32	35K TPR	264	7-1/2"/191	4-15/16"/126	Precision Ball	391R 35K 150 RZ
6	1-1/4"/32	32C Rubber on steel	264	7-1/2"/191	4-15/16"/126	Flange Bearing	391R 32C 150 BZ
8	1-1/4"/32	35K TPR	264	9-9/16"/243	6-5/16"/161	Precision Ball	391R 35K 200 RZ
8	1-1/4"/32	32C Rubber on steel	264	9-9/16"/243	6-5/16"/161	Flange Bearing	391R 32C 200 BZ

CENTRAL LOCKING FREE SWIVEL MODELS							
4	1-1/4"/32	35K TPR	220	5-1/2"/139	3-11/16"/92	Precision Ball	391A 35K 100 RZ
4	1-1/4"/32	32C Rubber on steel	220	5-1/2"/139	3-11/16"/92	Flange Bearing	391A 32C 100 BZ
5	1-1/4"/32	35K TPR	220	6-7/16"/164	4-7/16"/107	Precision Ball	391A 35K 125 RZ
5	1-1/4"/32	32C Rubber on steel	220	6-7/16"/164	4-7/16"/107	Flange Bearing	391A 32C 125 BZ
6	1-1/4"/32	35K TPR	264	7-1/2"/191	4-15/16"/126	Precision Ball	391A 35K 150 RZ
6	1-1/4"/32	32C Rubber on steel	264	7-1/2"/191	4-15/16"/126	Flange Bearing	391A 32C 150 BZ
8	1-1/4"/32	35K TPR	264	9-9/16"/243	6-5/16"/161	Precision Ball	391A 35K 200 RZ
8	1-1/4"/32	32C Rubber on steel	264	9-9/16"/243	6-5/16"/161	Flange Bearing	391A 32C 200 BZ

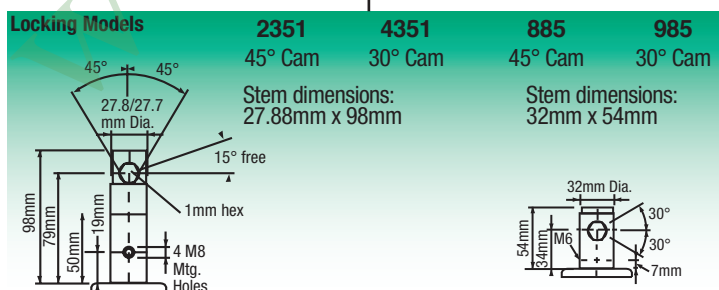

Central locking mechanism includes: Two locking hole options available • Locking hole in line or across direction of travel • Four M8 fixing holes • Snap-on adapter sleeves available for different tube dimensions