

# TWIN-MED GREY (TG)

## THREADED STEM MODELS

FREE SWIVEL • BRAKE

**NEW**



### APPLICATIONS

- Nursing Home Beds
- Medical Carts
- Diagnostic Equipment
- Electronic Equipment
- Patient Aids
- Patient Lifts

### FEATURES

- New Twin-Med Grey come with our new rounded pedal design and bottom undercover
- Wheels feature precision ball bearings for quieter smoother operation
- Softer quieter TPR tread design
- Double ball bearing located in the swivel raceway on 3" and 4" models
- 5" models feature a sealed precision bearing in the swivel raceway
- Wheels have easy rollability
- Designed to protect axle/bearing areas from hair/water
- Total Lock models lock both the wheel and swivel
- Directional Lock (locks swivel) models are available. Please consult factory.



Antistatic available, see page 102-103.

Special colors available. Consult factory.



Undercover shield for ultimate protection.



### FREE SWIVEL MODELS

Wheel Diameter (Inches)	Tread Width Inches (mm)	Wheel Description	Capacity (Lbs)	Load Height Inches (mm)	Swivel Radius Inches (mm)	Wheel Bearing	Model Number
4	2-39/64" (66)	Thermoplastic Rubber	220	5" (127)	3-1/8" (79)	Precision Ball	TG-04TPP-281-SW-____
5	3" (76)	Thermoplastic Rubber	246	6" (152)	4" (102)	Precision Ball	TG-05TPP-281-SW-____




### TOTAL LOCK MODELS (LOCKS WHEEL AND SWIVEL)

Wheel Diameter (Inches)	Tread Width Inches (mm)	Wheel Description	Capacity (Lbs)	Load Height Inches (mm)	Swivel Radius Inches (mm)	Wheel Bearing	Model Number
4	2-39/64" (66)	Thermoplastic Rubber	220	5" (127)	3-1/8" (79)	Precision Ball	TG-04TPP-281-TL-____
5	3" (76)	Thermoplastic Rubber	246	6" (152)	4" (102)	Precision Ball	TG-05TPP-281-TL-____

### THREADED STEM FITTINGS

See fittings page for more options.



Specify Threaded Stem (TS) code, see fittings below for dimensions:



# TWIN-MED GREY (TG)

## TOP PLATE MODELS

FREE SWIVEL • BRAKE

**NEW**



### APPLICATIONS

- Nursing Home Beds
- Medical Carts
- Diagnostic Equipment
- Electronic Equipment
- Patient Aids
- Patient Lifts

### FEATURES

- New Twin-Med Grey come with our new rounded pedal design and bottom undercover
- Wheels feature precision ball bearings for quieter smoother operation
- 5" now comes with a sealed precision bearing in the swivel raceway
- Softer quieter TPR tread design
- Double ball bearing located in the swivel raceway
- Wheels have easy rollability
- Designed to protect axle/bearing areas from hair/water
- Total Lock models lock both the wheel and swivel
- Directional Lock (locks swivel) models are available. Please consult factory.



Antistatic available, see page 102-103.

Special colors available. Consult factory.



Undercover shield for ultimate protection.



## FREE SWIVEL MODELS

Wheel Diameter (Inches)	Tread Width Inches (mm)	Wheel Description	Capacity (Lbs)	Load Height Inches (mm)	Swivel Radius Inches (mm)	Wheel Bearing	Model Number
4	2-39/64" (66)	Thermoplastic Rubber	220	5-3/8" (137)	3-1/8" (79)	Precision Ball	TG-04TPP-281-SW-___
5	3" (76)	Thermoplastic Rubber	246	6-3/8" (162)	4" (102)	Precision Ball	TG-05TPP-281-SW-___




## TOTAL LOCK MODELS (LOCKS WHEEL AND SWIVEL)

Wheel Diameter (Inches)	Tread Width Inches (mm)	Wheel Description	Capacity (Lbs)	Load Height Inches (mm)	Swivel Radius Inches (mm)	Wheel Bearing	Model Number
4	2-39/64" (66)	Thermoplastic Rubber	220	5-3/8" (137)	3-1/8" (79)	Precision Ball	TG-04TPP-281-TL-___
5	3" (76)	Thermoplastic Rubber	246	6-3/8" (162)	4" (102)	Precision Ball	TG-05TPP-281-TL-___

## TOP PLATE FITTINGS

See fittings page for more options.

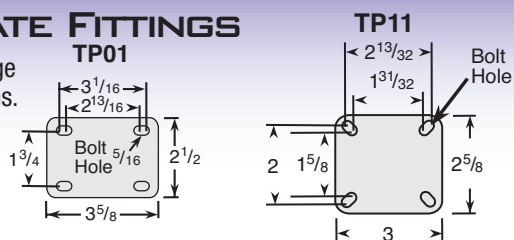

\*Change "TL" to "DL" for Direction Lock models. Available on all precision bearing models. TG-04TPP-281-DL-TP01 shown.